

EMK 546 Series



Aplicaciones

Filtro para supresión de interferencias, con conector IEC, interruptor, fusibles y inductancia a tierra para altos niveles de inmunidad. Con selector de tensión

Aplications

Filter for interference supression with IEC connector, fuses, switch and earth inductor for high immunity level. With voltage selector.

Características Principales

- De 1A a 6A
- Caja metálica compacto con conectores IEC (LINE) y Faston 6.3 (LOAD)
- Baja corriente de fugas 0.8mA

Features Include


- From 1A to 6A
- Compacted metallic box with IEC connector (LINE), and 6.3 Faston connection
- Low leakage current 0.8mA

Características Features


TIPO TYPE	EMK 546 - 1	EMK 546 - 3	EMK 546 - 6
TENSION NOMINAL RATED VOLTAGE	110 / 250 VAC	110 / 250 VAC	110 / 250 VAC
INTENSIDAD NOMINAL RATED CURRENT	1 A	3 A	6 A
CORRIENTE DE FUGAS LEAKAGE CURRENT	0.8 mA MAX 250V	0.8 mA MAX 250V	0.8 mA MAX 250V
TEST VOLTAJE	L/L	1450 VDC	1450 VDC
	L/T	2250 VDC	2250 VDC
AISLAMIENTO (250V DC) INSULATION RESIST. (250V DC)	100MΩ MIN. 250V DC	100MΩ MIN. 250V DC	100MΩ MIN. 250V DC
MAX. RESISTENCIA D. MAX. DIRECT CURRENT RESIST.	0.2Ω MAX.	0.15Ω MAX.	0.2Ω MAX.
INC. TEMPERATURA TEMPERATURE RANGE	30°C MAX.	30°C MAX.	30°C MAX.
TEMPERATURA DE TRABAJO OPERATING TEMPERATURE	-25 ~ +85°C	-25 ~ +85°C	-25 ~ +85°C
ATENUACION ATTENUATION	COMMON M. 25 dB MIN	0.60 ~ 50 MHz	0.60 ~ 50 MHz
	DIFFERENTIAL M. 25 Db MIN	0.15 ~ 50 MHz	0.40 ~ 50 MHz

Circuito Eléctrico


Electrical Schematic

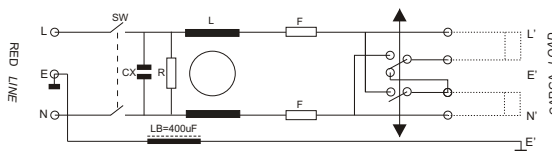


Perdidas de Inserción Insertion Loss




EMK 546 - 1

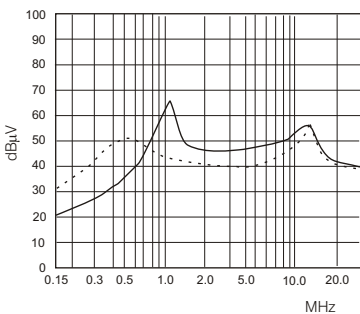

EMK 546 - 3

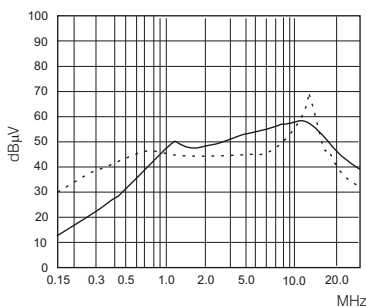

EMK 546 - 6

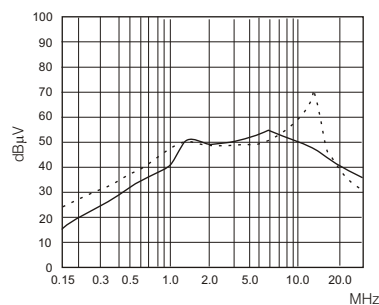

Dimensiones Dimensions

Dimensiones en mm.
Dimensions in mm.

